


DIVISION \_\_\_\_\_

Specification Section # \_\_\_\_\_

**Reverse Flange Flush Mount Tapered Aluminum Door Shield: *ALDSFMTRF***

**Details: Aluminum Door Shield Flush Mount Tapered with Reverse Flange: *ALDSFMTRF***

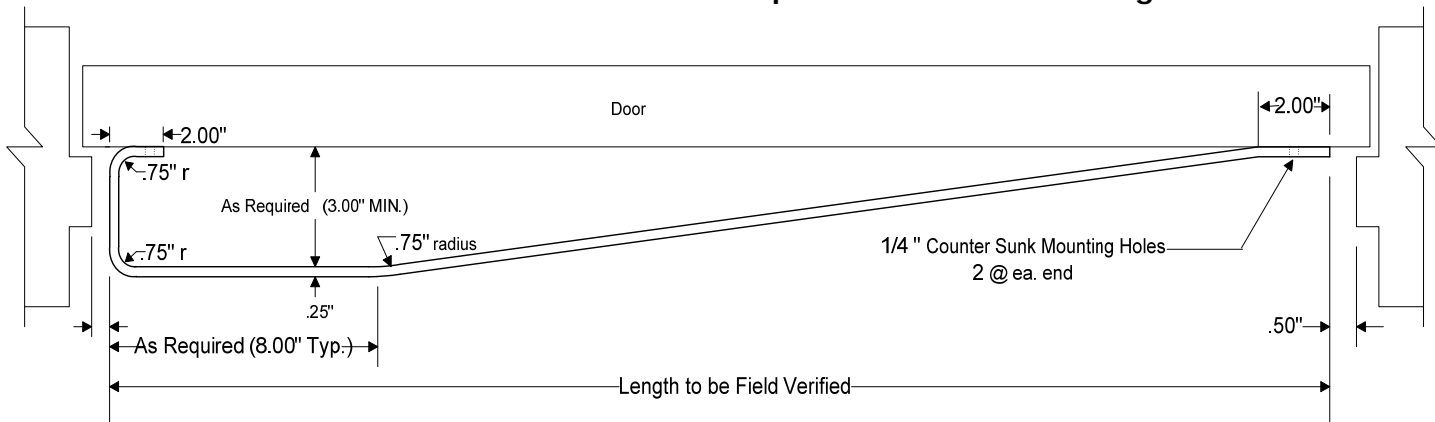

Specify:

1/4" x 4" or 1/4" x 6" 6061-T6 Aluminum Alloy (Anodized)

Aluminum, door mounted protection designed to protect the door from high impact. Can be mounted on both sides of the door.

**Materials: Rail**

- 1 Material: Material shall be 1/4 inch x (specify 4 inch or 6 inch) 6061-T6 extruded rectangular aluminum bar with 1/8 inch radius edge. Federal specification QQA-200/8.
- 2 Finish: Clear sulfuric anodized to military specification A8625 Type II. Note: anodizing to be performed after all cutting, drilling, counter-sinking and bending.
- 3 Packaging: Shield to be covered with 4 mil vinyl on all surfaces and packed in plywood crates for shipping to site.

**BRACKET MATERIAL:** NO BRACKETS NEEDED

**MOUNTING HARDWARE:** AS RECOMMENDED BY MANUFACTURER