


DIVISION \_\_\_\_\_

Specification Section # \_\_\_\_\_

**Flush Mount Tapered with Reverse Flange Sleeve Stainless Door Shield: *SSDSFMTRF***

**Details: Stainless Door Shield Flush Mount Tapered with Reverse Flange  
*SSDSFMTRF***

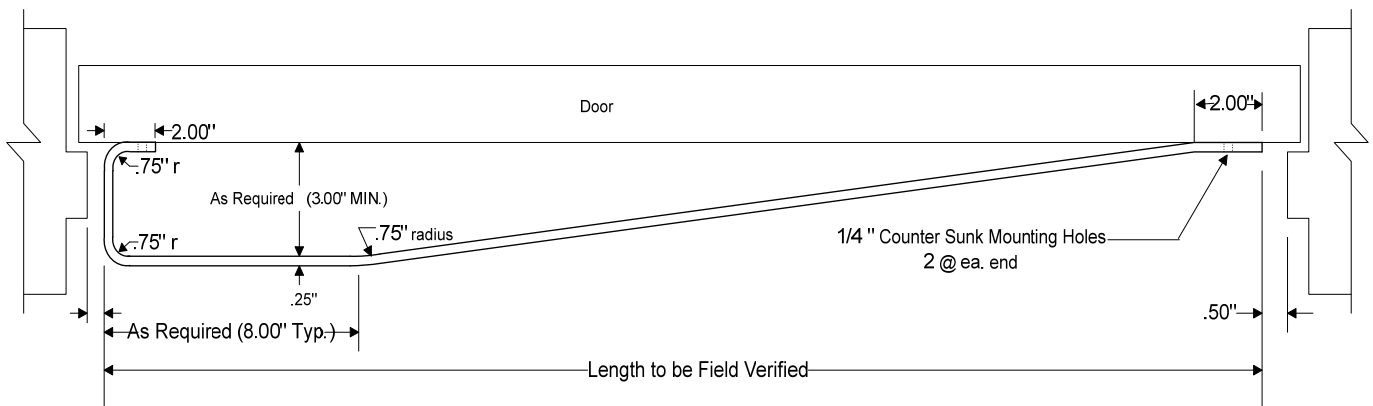

Specify 1/4" X 3"; 1/4" X 4"; or 1/4" X 6" 304 Stainless Steel Alloy

Stainless, door mounted protection designed to protect the door from high impact.

**RAIL:**

- 1 Material: Material shall be 1/4 inch x (**specify 3 inch, 4 inch or 6 inch**) type 304 stainless steel extruded true bar with edges chamfered to .031" minimum radius. Material specifications shall conform to ASTM A-276. The studs used for mounting the rail to the bracket shall be welded to the back side of rail. Federal specification QQA-200/8.
- 2 Finish shall be #4 polish

**BRACKET MATERIAL:** NO BRACKETS NEEDED

**MOUNTING HARDWARE:** AS RECOMMENDED BY MANUFACTURER