



Item # \_\_\_\_\_

We put space to work.

Job \_\_\_\_\_

# Metro® Stem Casters - Super Erecta®


**Metro Stem-Type Casters** are designed to fit Super Erecta® Shelf posts to form shelf carts and other mobile units. Bumpers are included with most casters as noted.

### Plated Casters with High Modulus treads

- Non marking high modulus donut tread and polyolefin hub. Plated horns, stems, axles, and brakes (optional) are appropriate for dry environments and for medium duty applications. Ball bearing swivel and axle. NSF listed. Bumpers included. Brake style: pedal brake.
- TPR tread (70 shore): Quieter than polyurethane and resilient rubber caster options.

Wheel Diameter (in.) (mm)	Face (in.) (mm)		Load Rating (lbs.) (kg.)		Type	Wheel Tread	Temperature range (Continuous usage) (Fahrenheit) (Celsius)		Apprx. Pkd. Wt. (lbs.) (kg.)		Super Erecta Cat. No.
5 127	1.25	32	250	113	Stem/Swivel	High Modulus Donut	-20° - 180°	-29° - 82°	2.1	1.0	<b>5MDA</b>
5 127	1.25	32	250	113	Stem/Brake	High Modulus Donut	-20° - 180°	-29° - 82°	2.3	1.0	<b>5MDBA</b>
5 127	1.25	32	250	113	Stem/Rigid	High Modulus Donut	-20° - 180°	-29° - 82°	2.1	1.0	<b>5MDRA</b>

Note: Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS, 30RS, or 36RS.

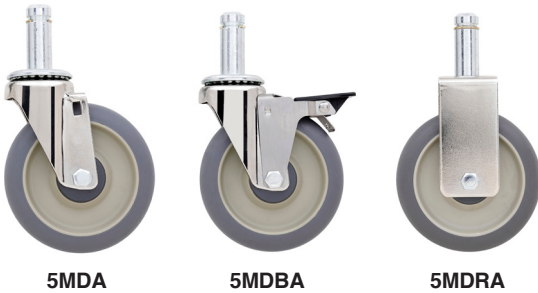

### For all rigid casters.

Rigid stem casters improve tracking and handling of mobile units over long distances. Rigid caster channels are selected at the time of order.

### How to Order:

Order (2) Rigid Casters  
Select Rigid Channel based on the depth of the shelving. (Provided at no charge)

Bumpers included with each caster.



### Plated Casters with Polyurethane Tread

- Chrome plated horns, stems, axles, and brakes (optional) are appropriate for dry environments and for medium duty applications. Non marking polyurethane flat tread and polyethylene hub. Ball bearing swivel and axle. NSF listed. Bumpers included. Brake style: side brake.

Wheel Diameter (in.) (mm)	Face (in.) (mm)		Load Rating (lbs.) (kg.)		Type	Wheel Tread	Temperature range (Continuous usage) (Fahrenheit) (Celsius)		Apprx. Pkd. Wt. (lbs.) (kg.)		Cat. No.
5 127	1.25	32	300	135	Stem/Swivel	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.4	1	<b>5MP</b>
5 127	1.25	32	300	135	Stem/Brake	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.6	1	<b>5MPB</b>
5 127	1.25	32	300	135	Stem/Rigid	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.1	1	<b>5MPR</b>
6 152	1.5	38	400	182	Stem/Swivel	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.25	1.1	<b>6MP</b>
6 152	1.5	38	400	182	Stem/Brake	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.5	0.9	<b>6MPB</b>
6 152	1.5	38	400	182	Stem/Rigid	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.5	1	<b>6MPR</b>

Note: Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS, 30RS, or 36RS.



All Metro Catalog Sheets are available on our website: [www.metro.com](http://www.metro.com)

L02-041

Printed in U.S.A. 5/23



**InterMetro Industries Corporation**  
 North Washington Street, Wilkes-Barre, PA 18705  
 Product Information. U.S. and Canada: 1.800.992.1776  
 Outside U.S. and Canada: [www.metro.com/contactus](http://www.metro.com/contactus)

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2023 InterMetro Industries Corp.



# Stem Casters — Super Erecta

# 11.20

# Stem Casters - Super Erecta

## Plated Casters with resilient rubber treads

- Solid resilient rubber material. Plated horns, stems, axles, and brakes (optional) are appropriate for dry environments and for medium duty applications. Ball bearing swivel. NSF listed. Bumpers included. Brake style: side brake.
- “LD” models have a plated hub cover.

Wheel Diameter (in.) (mm)	Face (in.) (mm)		Load Rating (lbs.) (kg.)		Type	Wheel Tread	Temperature range (Continuous usage)		Apprx. Pkd. Wt.		Cat. No.	
	(in.)	(mm)	(lbs.)	(kg.)			(Fahrenheit)	(Celsius)	(lbs.)	(kg.)		
4	102	15/16	24	125	56	Stem/Swivel	Resilient Donut	-20° - 160°	-29° - 71°	1-1/2	0.6	<b>4LD</b>
4	102	15/16	24	125	56	Stem/Brake	Resilient Donut	-20° - 160°	-29° - 71°	2	0.9	<b>4LDB</b>
5	127	15/16	24	125	56	Stem/Swivel	Resilient Donut	-20° - 160°	-29° - 71°	2	0.9	<b>5LD</b>
5	127	1-1/4	32	200	90	Stem/Swivel	Resilient, Flat	-20° - 160°	-29° - 71°	2.8	1.3	<b>5M</b>
5	127	1-1/4	32	200	90	Stem/Brake	Resilient, Flat	-20° - 160°	-29° - 71°	3.0	1.4	<b>5MB</b>
5	127	1-1/4	32	200	90	Stem/Rigid	Resilient, Flat	-20° - 160°	-29° - 71°	2.8	1.3	<b>5MR</b>

Note: Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS, 30RS, or 36RS.



## Low Profile 3" Threaded Stem Casters - For Super Erecta

- Threaded stem installs into the base of a standard stationary post.
- Resilient rubber tread. Bumpers not included.

Wheel Diameter (in.) (mm)	Face (in.) (mm)		Load Rating (lbs.) (kg.)		Type	Wheel Tread	Temperature range (Continuous usage)		Apprx. Pkd. Wt.		Super Erecta Cat. No.	
	(in.)	(mm)	(lbs.)	(kg.)			(Fahrenheit)	(Celsius)	(lbs.)	(kg.)		
3	.76	.94	24	100	45	Stem/Swivel	Resilient Rubber	-20° - 130°	-29° - 71°	1.0	0.45	<b>3TM</b>
3	.76	.94	24	100	45	Stem/Brake	Resilient Rubber	-20° - 130°	-29° - 71°	1.1	0.50	<b>3TMB</b>



# Stem Casters - Super Erecta

## Polymer & Stainless Total-Guard Caster

- High rust protection: Reinforced nylon rig with Stainless Steel stem and hardware.
- Maintenance Free: Sealed swivel SS ball bearings and Delrin axle bearings.
- Swivel and Total Lock Brake options.
- Pedal brake locks the wheel and the swivel motion. More control than conventional stem casters with wheel brakes only.
- Non-marking Thermoplastic Elastomer [TPE] tread (70 shore) is quieter and more shock absorbent than a TPU tread.



Outer rig consists of rust proof polymers, reinforced nylon, TPE wheel, and Polypropylene wheel hub.

Wheel Diameter		Face		Load Rating		Type	Wheel Tread	Temperature range (continuous)		Apprx. Pkd. Wt.		Super Erecta Model No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)			(Fahrenheit)	(Celsius)	(lbs.)	(kg)	
5	127	1.25	32	250	113	Stem/Swivel	TPE, Flat	-20° - 120°	-29° - 49°	1.7	0.8	<b>5PSTE</b>
5	127	1.25	32	250	113	Stem/Brake	TPE, Flat	-20° - 120°	-29° - 49°	1.9	0.9	<b>5PSTEB</b>

### Best uses...

- Best suited for use with MetroMax and Metroseal shelving
- Best tread for high humidity controlled environments
- Excellent Corrosion Resistance
- Excellent Chemical Resistance
- Best option for aquatic facilities (environments with high salt exposure)
- Low magnetism: Best option for MRI and RFID applications
- A good option for cart wash chamber cleaning processes.

### Where not to use...

- Tread not suited for exposure to acids or petroleum based chemicals.



**5PSTE**  
Swivel



**5PSTEB**  
Total Lock

## Standard Polymer Casters

- Basic corrosion protection: Reinforced nylon rig with chromate plated stem and swivel raceway
- Maintenance Free: Sealed swivel ball bearings and Delrin axle bearings
- Swivel, Total-Lock Brake, and Rigid options
- Pedal brake locks the wheel and swivel motion
- Non-marking polyurethane (TPU) tread
- Optional Models with built-in antimicrobial TPU tread

Wheel Diameter		Face		Load Rating		Type	Wheel Tread	Temperature range (continuous)		Apprx. Pkd. Wt.		Super Erecta Model No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)			(Fahrenheit)	(Celsius)	(lbs.)	(kg)	
5	127	1.25	32	300	135	Stem/Swivel	Polyurethane, Flat	-20° - 120°	-49° - 49°	2.0	0.9	<b>5PC</b>
5	127	1.25	32	300	135	Stem/Brake	Polyurethane, Flat	-20° - 120°	-49° - 49°	2.2	1.0	<b>5PCB</b>
5	127	1.25	32	300	135	Stem/Rigid	Polyurethane, Flat	-20° - 120°	-49° - 49°	2.0	0.9	<b>5PCR</b>
5	127	1.25	32	300	135	Stem/Swivel	Polyurethane, Flat	-20° - 120°	-49° - 49°	2.0	0.9	<b>5PCBM</b>
5	127	1.25	32	300	135	Stem/Brake	Polyurethane, Flat	-20° - 120°	-49° - 49°	2.2	1.0	<b>5PCBM</b>

Tread with built-in antimicrobial.

Note: Rigid connecting channel (aluminum): Cat. No. P14RC, P18RC, P21RC, P24RC, P30RC, or P36RC.

### Best uses...

- Basic Corrosion Protection versus common industrial casters
- Good Chemical Resistance

### Where not to use...

- Not suited for areas with spray sterilization processes on regular basis
- Not suited for high humidity controlled environments
- Not suited for high temperature cart wash chambers



**5PC**  
Swivel



**5PCB**  
Swivel & Brake



**5PCM**  
Antimicrobial  
Tread Swivel



**5PCBM**  
Antimicrobial  
Tread Swivel  
Brake



# Stem Casters - Super Erecta

We put space to work.

## Premium Type 304 Stainless Steel Casters

- Type 304 Stainless Steel Rig, Hardware and SS bearings.
- Non-marking Treads
- Swivel, Brake, and Rigid Options
- Pedal brake locks the wheel

Bumpers are included with each caster.



## Polyurethane (TPU) Tread Models

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)		Type	Wheel Tread	Temperature range (continuous) (Fahrenheit) (Celsius)		Apprx. Pkd. Wt. (lbs.) (kg)		Super Erecta Model No.		
5	127	1.25	32	300	135	Stem/Swivel	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.2	1.0	<b>5MPGSA</b>
5	127	1.25	32	300	135	Stem/Brake	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.4	1.1	<b>5MPBGSA</b>
5	127	1.25	32	300	135	Stem/Rigid	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.2	1.0	<b>5MPRGS</b>

Note: Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS, 30RS, or 36RS.



**5MPGSA**



**5MPBGSA**



**5MPRGS**

### Best uses...

- Best suited for high temperature cart wash chambers up to 180F (82C) when paired with Stainless Steel Shelving.
- Moving heavy loads regularly (90 shore TPU tread)
- High impact mobile uses (elevators, thresholds, ramps)
- Excellent Corrosion Resistance
- Excellent Chemical Resistance

## Thermoplastic Rubber (TPR) Tread Models

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)		Type	Wheel Tread	Temperature range (continuous) (Fahrenheit) (Celsius)		Apprx. Pkd. Wt. (lbs.) (kg)		Super Erecta Model No.		
5	127	1.25	32	250	113	Stem/Swivel	TPR donut	-20° - 180°	-29° - 82°	2.3	1.0	<b>5MDGSA</b>
5	127	1.25	32	250	113	Stem/Brake	TPR donut	-20° - 180°	-29° - 82°	2.5	1.1	<b>5MDBGSA</b>
5	127	1.25	32	250	113	Stem/Rigid	TPR donut	-20° - 180°	-29° - 82°	2.3	1.0	<b>5MDRGS</b>



**5MDGSA**



**5MDBGSA**



**5MDRGS**

### Best uses...

- Best tread for high humidity controlled environments
- Excellent Corrosion Resistance
- Excellent Chemical Resistance
- Softer TPR donut tread (70 shore) is more shock absorbent than TPU

### Where not to use...

- Tread not suited for exposure to acids or petroleum based chemicals.

### Maintenance - Stainless Casters

- TPU tread swivel and swivel/brake models: Swivel raceway has a grease fitting. The axle has sealed bearings that do not require additional lubrication.
- TPR tread swivel and swivel/brake models: swivel raceway and axles have grease fittings. Rigid caster model has an axle with a grease fitting.
- User should determine the frequency of maintenance based on their usage conditions.

# Stem Casters - Super Erecta

We put space to work.®

- **Swivel and Swivel/Brake casters** rotate a full 360 degrees for easy maneuvering.
- **Brakes:** Wheel brakes are foot operated.
- **Bumpers:** Non Phthalate vinyl material is strong yet flexible to protect walls from damage. Each caster, except where noted, includes a 3-1/2" (89mm) diameter bumper. Optional 5" (127mm) diameter bumpers are available.
- **Weight Load Capacity** of a cart (evenly distributed): Caster Load Rating x 3.
- **TableWorx** All casters in this spec sheet (Except 3TM and 3TMB on Page 2) are compatible with the larger 1-5/8" diameter mobile-ready TableWorx posts, which feature built-in adapters.

## Caster Wheel Material Guide

Caster Tread	Grease/Oil Resistance	Floor Protection	Load Rating	Key Advantage
Resilient Rubber	Low	High	200 lbs. (90kg)	Basic mobility.
High Modulus Rubber	High	High	250 lbs. (113kg)	Quieter than resilient rubber and polyurethane. Well suited for environments with constant exposure to moisture and/or high humidity.
Polyurethane	High	High	300 lbs. (135kg)	Easiest to move heavy loads.

## Replacement Bumpers

Non Phthalate Vinyl

Diameter		Height		Super Erecta
(in.)	(mm)	(in.)	(mm)	Cat. No.
3.5	89	.75	19	<b>9992DB</b>
5.5	140	.81	21	<b>9992N</b>




## Rigid Caster Channels

- Typically used opposite two swivel style casters to create carts that are easy to steer over long distances.

Note: A type 304 stainless rigid caster channel is included at no charge with each two rigid plated or SS casters. An aluminum rigid channel is included with each two polymer horn rigid casters (model 5PCR).

For shelf depth		Cat. No.	(For use with 5PCR)	
(in.)	(mm)		Cat. No.	Cat. No.
14"	355	<b>14RS</b>	<b>P14RC</b>	
18"	457	<b>18RS</b>	<b>P18RC</b>	
21"	530	<b>21RS</b>	<b>P21RC</b>	
24"	610	<b>24RS</b>	<b>P24RC</b>	
30"	760	<b>30RS</b>	<b>P30RC</b>	
36"	910	<b>36RS</b>	<b>P36RC</b>	

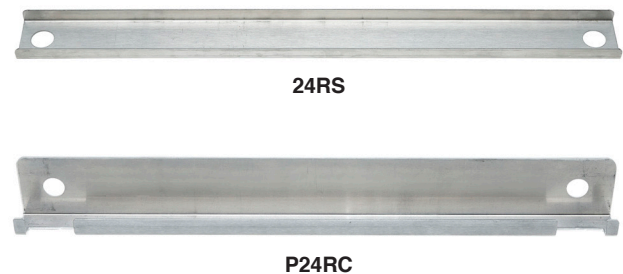

All Metro Catalog Sheets are available on our website [www.metro.com](http://www.metro.com).

an Ali Group Company



The Spirit of Excellence